

Case Mounted Accelerometers

User Guide

Bently Nevada* Asset Condition Monitoring



Description

The accelerometers in this sensor series offer a number of features making them well suited for harsh industrial environments and installation in locations with limited available space.

These case-mounted accelerometers provide acceleration measurements in units of g or m/s². The sensor has a standardized output voltage proportional to the level of acceleration which can interface to a variety of condition monitoring solutions.

The range of vibration frequencies detected by these sensors spans from 0.2 – 14,000 Hz.

Features

- Rugged stainless design, corrosion resistant
- Hermetic seal, case isolated
- ESD protection
- Reverse wiring protection
- EMI / RFI shielded
- Hazardous area certifications

Benefits

- Able to fit in small spaces
- Light weight for walk around programs
- Cross wiring will not harm sensor
- Prevents ground loops in permanent mount applications
- Can be hosed down or submersed with proper connector
- Can be used in applicable certified hazardous areas

See individual accelerometers for compliance.

Ordering Information



For a detailed list of country- and product-specific approvals, refer to the *Approvals Quick Reference Guide* (document 108M1756) at www.GEmeasurement.com.

Accelerometer Part Number

AM3100T2-Z2	Top exit sensor, 100 mV/g, Zone 2 rated
AS3100S2-Z2	Side exit sensor, 100 mV/g, Zone 2 rated
AP3500S2-Z1	Side exit sensor, 500 mV/g, Zone 1 rated
AP3500T2-Z1	Top exit sensor, 500 mV/g, Zone 1 rated
AS3100S2-Z0	Side exit sensor, 100 mV/g, Zone 0 rated
AM3100T2-Z0	Top exit sensor, 100 mV/g, Zone 0 rated

Accessories supplied:

- 1/4-28 to 1/4-28 mounting stud
- calibration data

AM3100T2-Z2

Specifications

Dynamic

Sensitivity, $\pm 5\%$ @25°C	100 mV/g
Acceleration range	80 g peak
Amplitude nonlinearity	1%
Frequency response	$\pm 10\%$: 1.0-5,000 Hz ± 3 dB : 0.7-10,000 Hz
Resonant frequency	30 kHz
Transverse sensitivity, max	$\pm 5\%$ of axial
Temperature response	-25°C : -10% +120°C : +10%

Electrical

Voltage source	18-30 VDC
Current regulating diode	2-10 mA
Broadband electrical noise @ 2.5 Hz to 25 kHz	700 μ g
Spectral electrical noise @ 10 Hz	7 μ g/VHz
Spectral electrical noise @ 100 Hz	4 μ g/VHz
Spectral electrical noise @ 1000 Hz	2 μ g/VHz
Output Impedance, max	100 Ω
Bias output voltage	12 VDC
Grounding	case isolated, internally shielded

Environmental

Temperature range	-50°C to 120°C
Vibration limit	500 g peak
Shock limit	5,000 g peak
Electromagnetic sensitivity, equiv g, max	70 μ g/gauss
Sealing hermetic base strain sensitivity, max	0.0002 g/ μ strain

Physical

Sensing element design	PZT ceramic / shear
Weight	62 grams
Case material	316L Stainless Steel
Mounting	71/4-28 UNF tapped hole
Connector	2-pin, MIL-C-5015 style
Recommended cabling	Shielded, twisted pair, no longer than 100 feet

Connections

Connector Pin	Function
Shell	ground
A	power/signal
B	common

 Frequency response and spectral noise values are typical.

Compliance and Certifications

 This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) This device must accept any interference received, including interference that may cause undesired operation.

European Community Directives

ATEX Directive 2014/34/EU
EMC Directive 2014/30/EU
LV Directive 2014/35/EU
Reach Directive 1907/2006/EC
ROHS Directive 2011/65/EU

Standards

EN 61326-1
EN 60079-0
EN 60079-15
EN 60079-11

Hazardous Area Approvals



For a detailed list of country- and product-specific approvals, refer to the *Approvals Quick Reference Guide* (document 108M1756) at www.GEmeasurement.com.



CSA/NRTL/C

Class I, Div 2, Groups A, B, C, D

Class I, Zone 2, AEx/Ex na II T4

Install per drawing 117M2767

AS3100S2-Z0

Specifications

Dynamic

Sensitivity, $\pm 5\%$ @25°C	100 mV/g
Acceleration range	80 g peak
Amplitude nonlinearity	1%
Frequency response	$\pm 10\%$: 1.0-5,000 Hz ± 3 dB : 0.7-10,000 Hz
Resonant frequency	22 kHz
Transverse sensitivity, max	$\pm 5\%$ of axial
Temperature response	-25°C : -10% +120°C : +10%

Electrical

Voltage source	18-30 VDC
Current regulating diode	2-10 mA
Broadband electrical noise @ 2.5 Hz to 25 kHz	700 μ g
Spectral electrical noise @ 10 Hz	10 μ g/VHz
Spectral electrical noise @ 100 Hz	5 μ g/VHz
Spectral electrical noise @ 1000 Hz	5 μ g/VHz
Output Impedance, max	100 Ω
Bias output voltage	12 VDC
Grounding	Case isolated, internally shielded

Environmental

Temperature range	-50°C to 120°C
Vibration limit	500 g peak
Shock limit	5,000 g peak
Electromagnetic sensitivity, equiv g, max	70 μ g/gauss
Sealing hermetic base strain sensitivity, max	0.0002 g/ μ strain

Physical

Sensing element design	PZT ceramic / shear
------------------------	---------------------

Weight	145 grams
Case material	316L Stainless Steel
Mounting	1/4-28 captive hex head ascrew
Connector	2-pin, MIL-C-5015 style
Recommended cabling	Shielded, twisted pair, no longer than 100 feet

Connections

Connector Pin	Function
Shell	ground
A	power/signal
B	common

 Frequency response and spectral noise values are typical.

Compliance and Certifications

 This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) This device must accept any interference received, including interference that may cause undesired operation.



European Community Directives

ATEX Directive 2014/34/EU
EMC Directive 2014/30/EU
LV Directive 2014/35/EU
Reach Directive 1907/2006/EC
ROHS Directive 2011/65/EU

Standards

EN 61326-1
EN 60079-0
EN 60079-15
EN 60079-11

Hazardous Area Approvals



For a detailed list of country- and product-specific approvals, refer to the *Approvals Quick Reference Guide* (document 108M1756) at www.GEmeasurement.com.

CSA/NRTL/C

Class I, Div 1, Groups A, B, C, D

Class II, Div 1, Groups E, F, G

Class III, Div 1

Class I, Zone 0, Ex ia IIC T4

Class I, Zone 0, AEx ia IIC T4

ATEX

Ga Ex ia IIC T4

Install per drawing 117M4394

AP3500S2-Z1

Specifications

Dynamic

Sensitivity, $\pm 5\%$ @25°C	500 mV/g
Acceleration range	80 g peak
Amplitude nonlinearity	1%
Frequency response	$\pm 10\%$: 0.4-1,500 Hz ± 3 dB : 0.2-3,700 Hz
Resonant frequency	18 kHz
Transverse sensitivity, max	$\pm 7\%$ of axial
Temperature response	-25°C : -8% +120°C : +5%

Electrical

Voltage source	18-30 VDC
Current regulating diode	2-10 mA
Broadband electrical noise @ 2.5 Hz to 25 kHz	12 μ g
Spectral electrical noise @ 10 Hz	2 μ g/VHz
Spectral electrical noise @ 100 Hz	0.6 μ g/VHz
Spectral electrical noise @ 1000 Hz	0.2 μ g/VHz
Output Impedance, max	100 Ω
Bias output voltage	10 VDC
Grounding	case isolated, internally shielded

Environmental

Temperature range	-50°C to 120°C
Vibration limit	250 g peak
Shock limit	2,500 g peak
Electromagnetic sensitivity, equiv g, max	5 μ g/gauss
Sealing hermetic base strain sensitivity, max	0.001 g/ μ strain

Physical

Sensing element design	PZT ceramic / shear
------------------------	---------------------

Weight	148 grams
Case material	316L Stainless Steel
Mounting	1/4-28 captive hex head screw
Connector	2-pin, MIL-C-5015 style
Recommended cabling	shielded, twisted pair, no longer than 100 feet

Connections

Connector Pin	Function
Shell	ground
A	power/signal
B	common

 Frequency response and spectral noise values are typical.

Compliance and Certifications

 This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) This device must accept any interference received, including interference that may cause undesired operation.



European Community Directives

ATEX Directive 2014/34/EU
EMC Directive 2014/30/EU
LV Directive 2014/35/EU
Reach Directive 1907/2006/EC
ROHS Directive 2011/65/EU

Standards

EN 61326-1
EN 60079-0
EN 60079-15
EN 60079-11

Hazardous Area Approvals



For a detailed list of country- and product-specific approvals, refer to the *Approvals Quick Reference Guide* (document 108M1756) at www.GEmeasurement.com.

CSA/NRTL/C

Class I, Div 1, Groups A, B, C, D

Class I, Zone 1: Ex ia IIC T4

Install per drawing 117M4393

AM3100T2-Z0

Specifications

Dynamic

Sensitivity, $\pm 5\%$ @25°C	100 mV/g
Acceleration range	80 g peak
Amplitude nonlinearity	1%
Frequency response	$\pm 10\%$: 0.7-9,000 Hz ± 3 dB : 0.4-14,000 Hz
Resonant frequency	30 kHz
Transverse sensitivity, max	$\pm 5\%$ of axial
Temperature response	-25°C : -10% +120°C : +10%

Electrical

Voltage source	18-30 VDC
Current regulating diode	2-10 mA
Broadband electrical noise @ 2.5 Hz to 25 kHz	500 μ g
Spectral electrical noise @ 10 Hz	7 μ g/VHz
Spectral electrical noise @ 100 Hz	4 μ g/VHz
Spectral electrical noise @ 1000 Hz	2 μ g/VHz
Output Impedance, max	100 Ω
Bias output voltage	12 VDC
Grounding	case isolated, internally shielded

Environmental

Temperature range	-50°C to 120°C
Vibration limit	500 g peak
Shock limit	5,000 g peak
Electromagnetic sensitivity, equiv g, max	70 μ g/gauss
Sealing hermetic base strain sensitivity, max	0.0002 g/ μ strain

Physical

Sensing element design	PZT ceramic / shear
------------------------	---------------------

Weight	62 grams
Case material	316L Stainless Steel
Mounting	1/4-28 UNF tapped hole
Connector	2-pin, MIL-C-5015 style
Recommended cabling	shielded, twisted pair, no longer than 100 feet

Connections

Connector Pin	Function
Shell	ground
A	power/signal
B	common

 Frequency response and spectral noise values are typical.

Compliance and Certifications

 This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) This device must accept any interference received, including interference that may cause undesired operation.



European Community Directives

ATEX Directive 2014/34/EU
EMC Directive 2014/30/EU
LV Directive 2014/35/EU
Reach Directive 1907/2006/EC
ROHS Directive 2011/65/EU

Standards

EN 61326-1
EN 60079-0
EN 60079-15
EN 60079-11

Hazardous Area Approvals



For a detailed list of country- and product-specific approvals, refer to the *Approvals Quick Reference Guide* (document 108M1756) at www.GEmeasurement.com.

CSA/NRTL/C

Class I, Div 1, Groups A, B, C, D

Class II, Div 1, Groups E, F, G

Class III, Div 1

Class I, Zone 0, Ex ia IIC T4

Class I, Zone 0, AEx ia IIC T4

ATEX

Ga Ex ia IIC T4

Install per drawing 117M4394

AP3500T2-Z1

Specifications

Dynamic

Sensitivity, $\pm 5\%$ @25°C	500 mV/g
Acceleration range	10 g peak
Amplitude nonlinearity	1%
Frequency response	$\pm 10\%$: 0.4-1,000 Hz ± 3 dB : 0.2-2,300 Hz
Resonant frequency	15 kHz
Transverse sensitivity, max	$\pm 5\%$ of axial
Temperature response	-25°C : -10% +120°C : +10%

Electrical

Voltage source	18-30 VDC
Current regulating diode	2-10 mA
Broadband electrical noise @ 2.5 Hz to 25 kHz	8 μ g
Spectral electrical noise @ 10 Hz	2 μ g/VHz
Spectral electrical noise @ 100 Hz	0.4 μ g/VHz
Spectral electrical noise @ 1000 Hz	0.2 μ g/VHz
Output Impedance, max	100 Ω
Bias output voltage	10 VDC
Grounding	case isolated, internally shielded

Environmental

Temperature range	-50°C to 120°C
Vibration limit	250 g peak
Shock limit	5,000 g peak
Electromagnetic sensitivity, equiv g, max	20 μ g/gauss
Sealing hermetic base strain sensitivity, max	0.0001 g/ μ strain

Physical

Sensing element design	PZT ceramic / shear
------------------------	---------------------

Weight	142 grams
Case material	316L Stainless Steel
Mounting	1/4-28 UNF tapped hole
Connector	2-pin, MIL-C-5015 style
Recommended cabling	shielded, twisted pair, no longer than 100 feet

Connections

Connector Pin	Function
Shell	ground
A	power/signal
B	common

 Frequency response and spectral noise values are typical.

Compliance and Certifications

 This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) This device must accept any interference received, including interference that may cause undesired operation.



European Community Directives

ATEX Directive 2014/34/EU
EMC Directive 2014/30/EU
LV Directive 2014/35/EU
Reach Directive 1907/2006/EC
ROHS Directive 2011/65/EU

Standards

EN 61326-1
EN 60079-0
EN 60079-15
EN 60079-11

Hazardous Area Approvals



For a detailed list of country- and product-specific approvals, refer to the *Approvals Quick Reference Guide* (document 108M1756) at www.GEmeasurement.com.

CSA/NRTL/C

Class I, Div 1, Groups A, B, C, D

Class I, Zone 1, Ex ia IIC T4

Install per drawing 117M43937

AS3100S2-Z2

Specifications

Dynamic

Sensitivity, $\pm 5\%$ @25°C	100 mV/g
Acceleration range	80 g peak
Amplitude nonlinearity	1%
Frequency response	$\pm 10\%$: 1.0-5,000 Hz ± 3 dB : 0.7-10,000 Hz
Resonant frequency	22 kHz
Transverse sensitivity, max	$\pm 5\%$ of axial
Temperature response	-25°C : -10% +120°C : +19%

Electrical

Voltage source	18-30 VDC
Current regulating diode	2-10 mA
Broadband electrical noise @ 2.5 Hz to 25 kHz	700 μ g
Spectral electrical noise @ 10 Hz	10 μ g/VHz
Spectral electrical noise @ 100 Hz	5 μ g/VHz
Spectral electrical noise @ 1000 Hz	5 μ g/VHz
Output Impedance, max	100 Ω
Bias output voltage	12 VDC
Grounding	case isolated, internally shielded

Environmental

Temperature range	-50°C to 120°C
Vibration limit	500 g peak
Shock limit	5,000 g peak
Electromagnetic sensitivity, equiv g, max	70 μ g/gauss
Sealing hermetic base strain sensitivity, max	0.0002 g/ μ strain

Physical

Sensing element design	PZT ceramic / shear
------------------------	---------------------

Weight	62 grams
Case material	316L Stainless Steel
Mounting	1/4-28 UNF tapped hole
Connector	2-pin, MIL-C-5015 style
Recommended cabling	Shielded, twisted pair, no longer than 100 feet

Connections

Connector Pin	Function
Shell	ground
A	power/signal
B	common



Frequency response and spectral noise values are typical.

Compliance and Certifications



This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) This device must accept any interference received, including interference that may cause undesired operation.



European Community Directives

ATEX Directive 2014/34/EU
EMC Directive 2014/30/EU
LV Directive 2014/35/EU
Reach Directive 1907/2006/EC
ROHS Directive 2011/65/EU

Standards

EN 61326-1
EN 60079-0
EN 60079-15
EN 60079-11:2011

Hazardous Area Approvals



For a detailed list of country- and product-specific approvals, refer to the *Approvals Quick Reference Guide* (document 108M1756) at www.GEmeasurement.com.

CSA/NRTL/C

Class I, Div 1, Groups A, B, C, D

Class I, Zone 2: AEx/Ex na II T4

Install per drawing 117M2767

Graphs and Figures

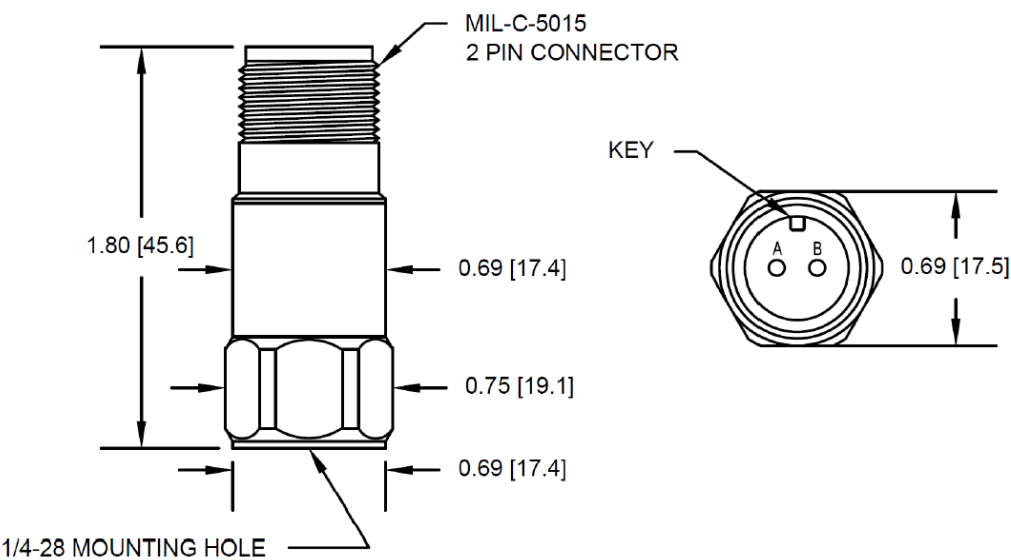


Figure 1: AM3100T2-Z2 dimensions

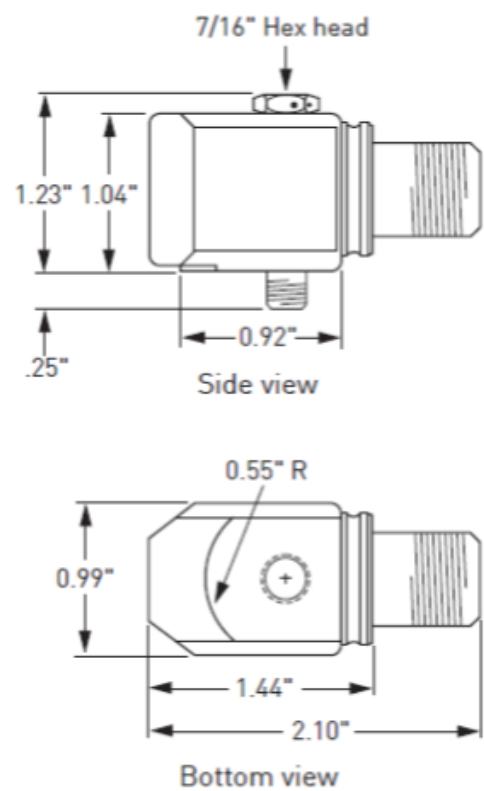


Figure 2: AS3100S2-Z0 dimensions

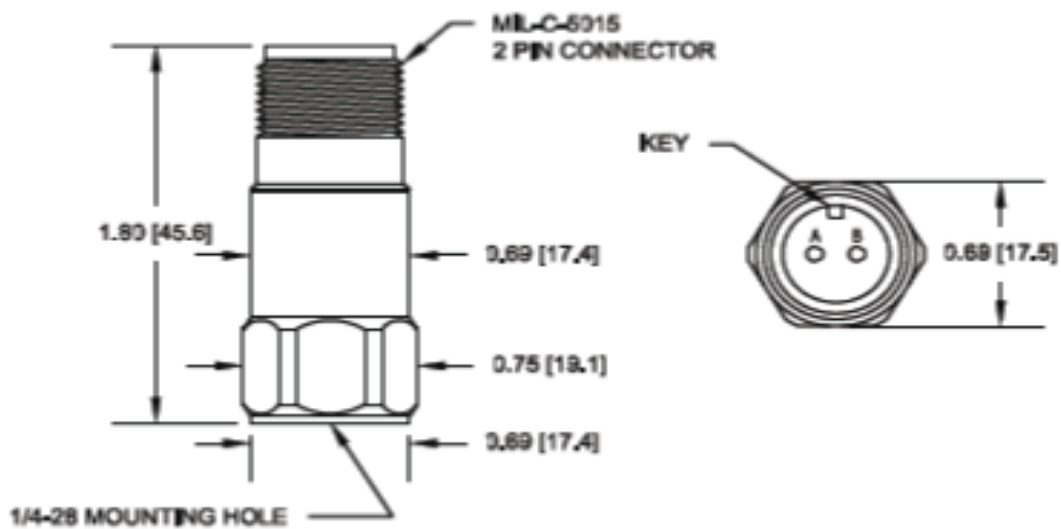


Figure 3: AM3100T2-Z0 dimensions

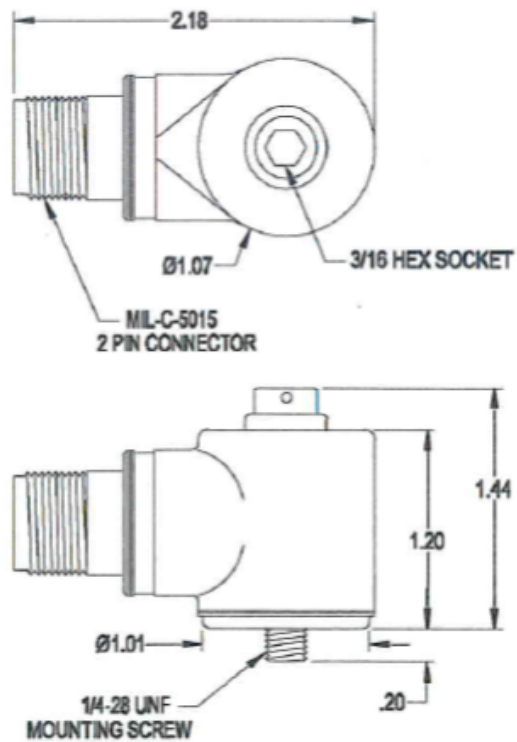


Figure 4: AP3500S2-Z1 dimensions

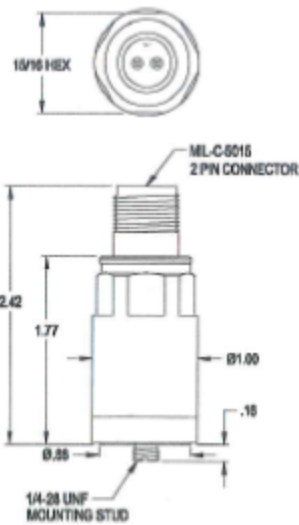


Figure 5: AP3500T2-Z1 dimensions

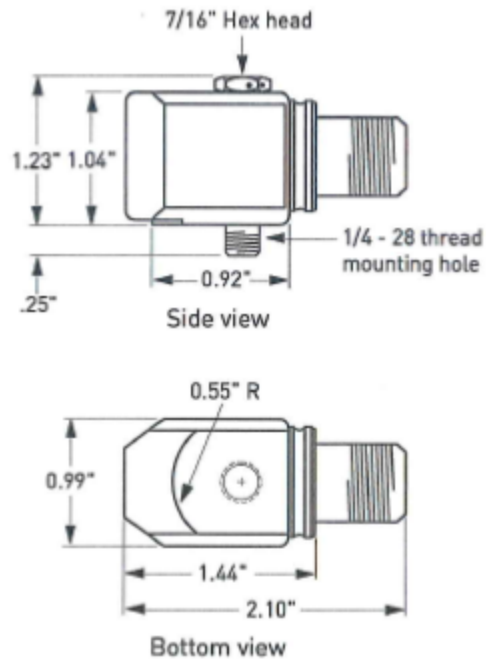


Figure 6: AS3100S2-Z2 dimensions

Copyright 2018 Baker Hughes, a GE company, LLC ("BHGE") All rights reserved.

* Denotes a trademark of Bently Nevada, LLC.

All product and company names are trademarks of their respective holders.

Use of the trademarks does not imply any affiliation with or endorsement by the respective holders.

The information contained in this document is subject to change without prior notice.

Printed in USA. Uncontrolled when transmitted electronically.

1631 Bently Parkway South, Minden, Nevada USA 89423

Phone: 1-775.782.3611 www.GEmeasurement.com