

3500/40M Proximator* Monitor

Product Datasheet

Bently Nevada* Asset Condition Monitoring



Description

The 3500/40M Proximator* Monitor is a four-channel monitor that accepts input from Bently Nevada* proximity transducers, conditions the signal to provide various vibration and position measurements, and compares the conditioned signals with user-programmable alarms. The user can program each channel of the 3500/40M with the 3500 Rack Configuration Software to perform any of the following functions:

- Radial vibration
- Thrust position
- Differential expansion
- Eccentricity
- REBAM

The primary purpose of the 3500/40M Proximator* Monitor is to provide the following:

- Machinery protection by continuously comparing monitored parameters against configured alarm setpoints to drive alarms
- Essential machine information for both operations and maintenance personnel

Each channel, depending on configuration, typically conditions its input signal to generate various parameters called **static values**. You can configure **alert setpoints** for each active static value and **danger setpoints** for any two of the active static values.



NOTE



You program the monitor channels in pairs. The monitor channels can perform up to 2 of these functions at a time. Channels 1 and 2 can perform one function, while channels 3 and 4 perform another (or the same) function.



Specifications

Inputs

Signal	Accepts from 1 to 4 proximity transducer signals
Power consumption	7.7 watts, typical
Input Impedance	
Standard I/O	10 k Ω (Proximitors and acceleration inputs)
TMR I/O	The effective impedance of three bussed TMR I/O channels wired in parallel to one transducer is 50 k Ω

Sensitivity

Radial Vibration	3.94 mV/ μ m (100 mV/mil) or 7.87 mV/ μ m (200 mV/mil)
Thrust	3.94 mV/ μ m (100 mV/mil) or 7.87 mV/ μ m (200 mV/mil)
Eccentricity	3.94 mV/ μ m (100 mV/mil) or 7.87 mV/ μ m (200 mV/mil)
Differential Expansion	0.394 mV/ μ m (10 mV/mil) or 0.787 mV/ μ m (20 mV/mil)
REBAM	40 mV/ μ m (1000 mV/mil) or 80 mV/ μ m (2000 mV/mil)

Outputs

Front Panel LEDs

OK LED	Indicates when the 3500/40M SIL Proximitors are operating properly.
TX/RX LED	Indicates when the 3500/40M SIL Proximitors are communicating with other modules in the 3500 rack.
Bypass LED	Indicates when the 3500/40M SIL Proximitors are in Bypass Mode.
Buffered Transducer Outputs	The front of each monitor has one coaxial connector for each channel. Each connector is short-circuit protected.
Output Impedance	550 Ω
Transducer Power Supply	-24 Vdc

Signal Conditioning

NOTE: Specified at +25 °C (+77 °F) unless otherwise noted.

Radial Vibration

Frequency Response

Direct filter	User-programmable Single-pole 4 Hz to 4000 Hz or 1 Hz to 600 Hz
Gap filter	-3 dB at 0.09 Hz
Not 1X filter	60 cpm to 15.8 times running speed Constant Q notch filter Minimum rejection in stopband of -34.9 dB
Smax	0.125 to 15.8 times running speed
1X and 2X vector filter	Constant Q Filter Minimum rejection in stopband of -57.7 dB



NOTE: 1X and 2X Vector, Not 1X, and Smax parameters are valid for machine speeds of 60 cpm to 60,000 cpm.

Accuracy

Direct and Gap	Exclusive of filtering Within $\pm 0.33\%$ of full-scale typical $\pm 1\%$ maximum
1X and 2X	Within $\pm 0.33\%$ of full-scale typical $\pm 1\%$ maximum
Smax	Within $\pm 5\%$ maximum
Not 1X	$\pm 3\%$ for machine speeds less than 30,000 cpm $\pm 8.5\%$ for machine speeds greater than 30,000 cpm

Thrust and Differential Expansion

Accuracy	Within $\pm 0.33\%$ of full-scale typical $\pm 1\%$ maximum
Frequency Response	
Direct filter	-3 dB at 1.2 Hz
Gap filter	-3 dB at 0.41 Hz

Eccentricity

Accuracy	Within $\pm 0.33\%$ of full-scale typical $\pm 1\%$ maximum
Frequency Response	
Direct filter	-3 dB at 15.6 Hz
Gap filter	-3 dB at 0.41 Hz

REBAM

Frequency Response	
Spike	User-programmable from 0.152 to 8678 Hz
Element	User-programmable for BPFO ranging from 0.139 to 3836 Hz High-pass corner is 0.8x BPFO. Low-pass corner is 2.2x BPFO.
Rotor	User programmable from 0.108 to 2221 Hz
Direct	Programmable from 3.906 to 14.2 Hz Selection is determined by Spike and Rotor filters.
Gap	Programmable from 0.002 to 1.0 Hz Selection is determined by the Rotor filter.

1X vector filter	The range of shaft speeds for which the value is valid depends on the nominal shaft speed for which the channel is configured.
------------------	--

Table 1: Relationship Between Nominal Shaft Speed and the Valid Speed Range

Nominal Shaft Speed (Hz)	Valid Speed Range (Hz)
10 to <126	0.071 to 160
126 to <252	0.133 to 330
252 to <504	0.25 to 660
504 to 584	0.50 to 750



NOTE: If a multi-event gear or speed wheel generates the speed input, the upper limitation of the resultant input signal is approximately 20 KHz.

Filter Quality	
Spike high-pass	6-pole Elliptic (155 dB per decade, minimum) Corner frequency is -0.1 dB.
Element bandpass	8-pole Butterworth (155 dB per decade minimum) Corner frequency is -3 dB.
Rotor low-pass	6-pole Elliptic (155 dB per decade, minimum) Corner frequency is -0.1 dB.
Rotor, direct high-pass	1-pole Butterworth (18 dB per decade, minimum) Corner frequency is -3 dB.
Spike, direct low-pass	Corner is -0.3 dB maximum.
Gap low-pass	1-pole Butterworth (18 dB per decade, minimum) Corner frequency is -3 dB.
1X amplitude	Constant Q of 16.67 Stopband frequencies are 0.91 and 1.09 times the running speed. Stopband attenuation is -51 dB minimum.

Accuracy	
Amplitude	Within $\pm 0.33\%$ of full scale typical $\pm 1\%$ maximum when input signal is at the center frequency of the proportional value's passband
Phase	3 degrees error, maximum
Channels enabled	Certain configurations allow the user to enable only one channel of a channel pair.

Filter Tracking / Stepping (Requires a valid speed signal)	
Initial condition	Nominal filter set used
Switch from nominal to lower filter set	Current shaft speed $\leq 0.9 \times$ (nominal shaft speed)
Switch from lower to nominal filter set	Current shaft speed $\geq 0.95 \times$ (nominal shaft speed)
Switch from nominal to higher filter set	Current shaft speed $\geq 1.1 \times$ (nominal shaft speed)
Switch from higher to nominal filter set	Current shaft speed $\leq 1.05 \times$ (Nominal Shaft Speed)
Shaft speed error condition	Nominal filter set used

Physical

Monitor Module (Main Board)	
Dimensions (Height x Width x Depth)	241.3 mm x 24.4 mm x 241.8 mm (9.50 in x 0.96 in x 9.52 in)
Weight	0.91 kg (2.0 lb)
I/O Modules (non-barrier)	
Dimensions (Height x Width x Depth)	241.3 mm x 24.4 mm x 99.1 mm (9.50 in x 0.96 in x 3.90 in)
Weight	0.20 kg (0.44 lb)
I/O Modules (barrier)	
Dimensions (Height x Width x Depth)	241.3 mm x 24.4 mm x 163.1 mm (9.50 in x 0.96 in x 6.42 in)
Weight	0.46 kg (1.01 lb)

Rack Space Requirements

Monitor	1 full-height front slot
I/O Modules	1 full-height rear slot

Barrier Parameters

The following parameters apply to CSA-NRTL/C and ATEX / IECEx approvals.

Proximity Barrier	
Circuit Parameters	V _{max} (PWR) = 26.25V (SIG) = 13.65 V
	I _{max} (PWR) = 110.48 mA (SIG) = 2.74mA
	R _{min} (PWR) = 237.6 Ω (SIG) = 4985 Ω
Channel Parameters (entity)	V _{max} = 27.45 V I _{max} = 113.24 mA R _{min} (PWR) = 237.6 Ω (SIG) = 4985 Ω

Alarms

Alarm Setpoints	Use Rack Configuration Software to set alert levels for each value measured by the monitor and Danger setpoints for any two of the values measured by the monitor. Alarms are adjustable from 0 to 100% of full-scale for each measured value. However, when the full-scale range exceeds the range of the transducer, the range of the transducer will limit the setpoint.
Accuracy of alarm setpoints	Within 0.13% of the desired value

Alarm Time Delays

You can program alarm delays using **Rack Configuration Software**.

Radial vibration, thrust, differential expansion and eccentricity	
Alert	From one to 60 seconds in one second intervals
Danger	0.1 seconds or from one to 60 seconds in 0.5 second intervals
REBAM	
Alert	From the calculated minimum value to 400 seconds in one second intervals
Danger	From the calculated minimum value to 400 seconds in 0.5 second intervals

Static Values

Static values are measurements used to monitor the machine. The 3500/40M Proximator* Monitor returns the following static values:

Radial Vibration	Direct, Gap, 1X Amplitude, 1X Phase Lag, 2X Amplitude, 2X Phase Lag, Not 1X Amplitude and Smax Amplitude
Thrust Position	Direct, Gap
Differential Expansion	Direct, Gap
Eccentricity	Peak-to-peak, Gap, Direct Minimum, Direct Maximum
REBAM	Spike, Element, Rotor, Direct, Gap, 1X Amplitude, 1X Phase Lag

Hazardous Area Approvals



For the detailed listing of country and product specific approvals, refer to the **Approvals Quick Reference Guide**, document 108M1756, at www.GEmeasurement.com.

CSA/NRTL/C (Approval Option 01)

When used with I/O module ordering options with internal barriers	Ex nC [ia] IIC T4 Gc Class I, Division 1, Groups A, B, C and D Class I, Zone 2/0 AEx nC [ia] IIC T4 Gc Class I, Division 1 Groups A, B, C and D T4 @ Ta = -20 °C ≤ Ta ≤ +65 °C (-4 °F ≤ Ta ≤ +149 °F) per drawing 138547
When used with I/O module ordering options without internal barriers	Ex nC [L] IIC T4 Gc Class I, Division 2, Groups A, B, C and D Class I, Zone 2 AEx nC IIC T4 Gc Class I, Division 2 Groups A, B, C and D T4 @ Ta = -20 °C ≤ Ta ≤ +65 °C (-4 °F ≤ Ta ≤ +149 °F) per drawing 149243

ATEX/IECEx (Approval Option 02)

For ATEX/IECEx agency approval ordering options with internal barriers	 II 3 (1) G Ex nA nC ic [ia Ga] IIC T4 Gc T4 @ Ta = -20 °C ≤ Ta ≤ +65 °C (-4 °F ≤ Ta ≤ +149 °F)
For ATEX/IECEx agency approval ordering options without internal barriers	 II 3 G Ex nA nC ic IIC T4 Gc T4 @ Ta = -20 °C ≤ Ta ≤ +65 °C (-4 °F ≤ Ta ≤ +149 °F)

Environmental Limits

Operating Temperature	When used with Internal/External Termination I/O Module: -30°C to +65°C (-22°F to +149°F) When used with Internal Barrier I/O Module (Internal Termination) 0°C to +65°C (32°F to +149°F)
Storage Temperature	-40°C to +85°C (-40°F to +185°F)
Humidity	95% Non-condensing

Compliance and Certifications

EMC	Standards: EN 61000-6-2 Immunity for Industrial Environments EN 61000-6-4 Emissions for Industrial Environments European Community Directives: EMC Directive 2014/30/EU
Electrical Safety	Standards: EN 61010-1 European Community Directives: LV Directive 2014/35/EU

Ordering Information



For the detailed listing of country and product specific approvals, refer to the **Approvals Quick Reference Guide**, document 108M1756, at www.GEmeasurement.com.

General

The 3500/40M Module requires the following (or later) firmware, and software revisions:

3500/01 Software – Version 2.50

3500/02 Software – Version 2.20

3500/03 Software – Version 1.21

When ordering I/O Modules with External Terminations the External Termination Blocks and Cable must be ordered separately for each I/O Module.

External Termination Blocks cannot be used with Internal Termination I/O Modules.

Bussed External Termination Blocks are to be used with TMR I/O Modules only.

Internal Barrier I/O Modules

Consult the 3500 Internal Barrier specification sheet (Document 141495) if the Internal Barrier Option is selected.

REBAM

The REBAM channel type requires the following (or later) firmware, and software revisions:

3500/40M Module Firmware – Revision 2.1

3500/01 Software – Version 3.30

3500/02 Software – Version 2.40

3500/03 Software – Version 1.40

DM2000 Software - Version 3.40.

Requires the M version of the 3500 Proximitor Monitor.

Proximitor Monitor 3500/40 - AXX - BXX

A: I/O Module Type

- 01 Proximitor I/O Module with Internal Termination
- 02 Proximitor I/O Module with External Terminations
- 03 Proximitor I/O Module with Internal Barriers and Internal Terminations
- 04 TMR Proximitor I/O Module with External Termination

B: Agency Approval Option

- 00 None
- 01 CSA / NRTL/ C (Class I, Division 2)
- 02 ATEX / IECEx / CSA(Class I,Zone 2)

External Termination Blocks

125808-01	Proximitor ET Block Euro Style Connectors
128015-01	Proximitor ET Block Terminal Strip Connectors
132242-01	Proximitor/ Seismic TMR ET Block Euro Style Connectors
132234-01	Proximitor/Seismic TMR ET Block Terminal Strip Connectors

Cables

3500 Transducer XDCR signal to External Termination (ET) Block Cable 129525 - AXXXX - BXX

A: I/O Cable length

- 0005 5 feet 1.5 metres)
- 0007 7 feet(2.1 metres)
- 0010 10 feet(3.0 metres)
- 0025 25 feet(7.6metres)
- 0050 50 feet(15.2 metres)
- 0100 100 feet(30.5 metres)


B: Assembly Instructions

- 01 Not assembled
- 02 Assembled

Spares

176449-01	3500/40M Proximitor Monitor
125680-01	Proximitor I/O Module with Internal Terminations
126615-01	Proximiotr I/O Module with Extrnal Terminations
135489-04	Proximitor I/O Module with Internal Barriers and Internal Terminations
149716-01	TMR Proximitor I/O Module with External Terminations
143488-01	3500/40M Monitor Manual
00580434	Internal I/O Module connector header, Euro style, 8-pin
00502133	Internal I/O Module connector header, Euro style, 12-pin

Graphs and Figures

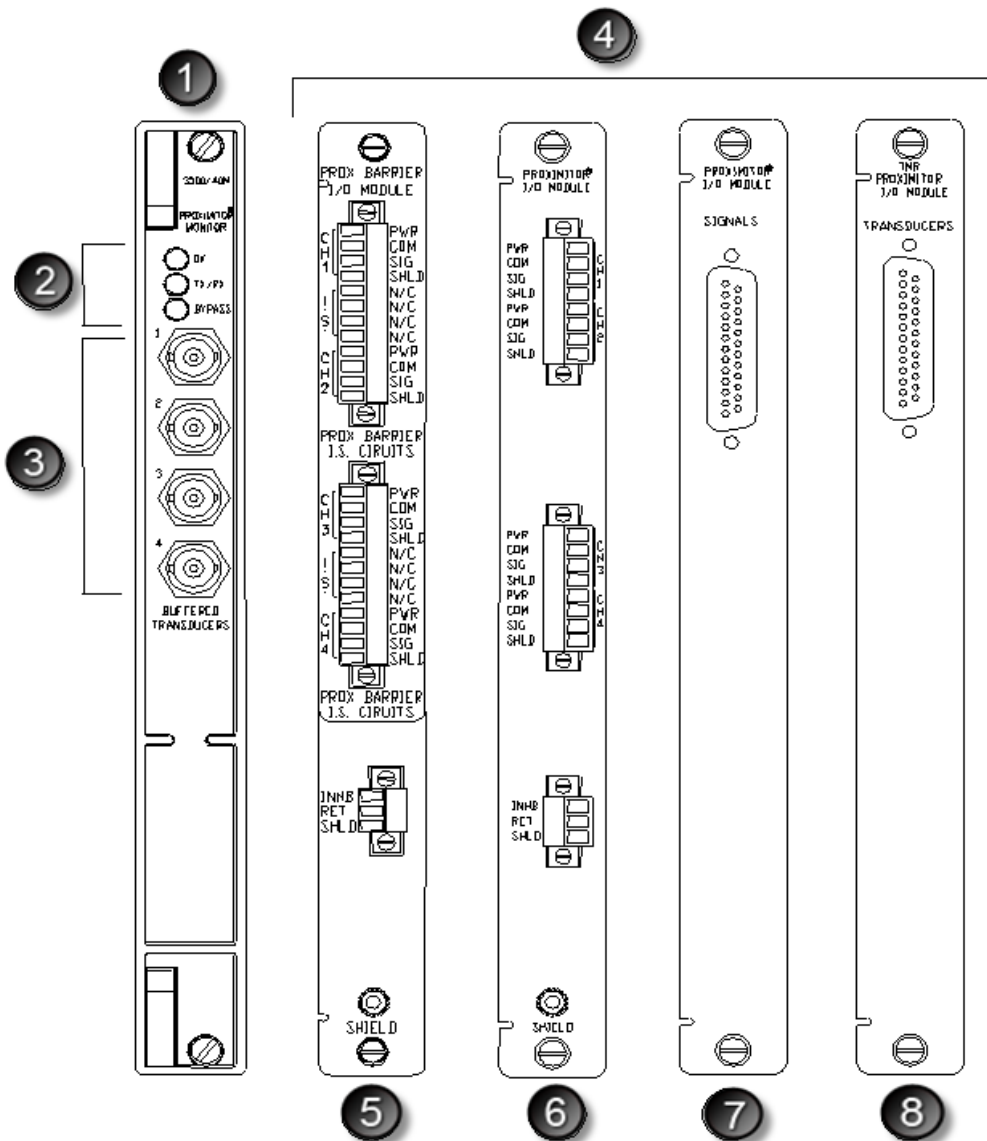

- 1: Main Module Front View
- 2: Status LEDs.
- 3: Buffered Transducer Outputs.
- 4: I/O modules
- 5: Barrier I/O module, Internal Termination.
- 6: I/O Module, Internal Termination.
- 7: I/O Module, External Termination.
- 8: I/O Module, External Termination.

Figure 1: Assorted Proximitor Monitor Views

Copyright 1999 - 2017 Baker Hughes, a GE company, LLC ("BHGE") All rights reserved.

* Denotes a trademark of Bently Nevada, LLC, a wholly owned subsidiary of Baker Hughes, a GE company.

All product and company names are trademarks of their respective holders.

Use of the trademarks does not imply any affiliation with or endorsement by the respective holders.

The information contained in this document is subject to change without prior notice.

1631 Bently Parkway South, Minden, Nevada USA 89423

Phone: 1-775.782.3611 www.GEmeasurement.com